



WORLD OIL

ANTIFREEZE

MULTI-PURPOSE ADVANCED FORMULA

DK600
DK600P (PRE-DILUTED)

World Oil Antifreeze – Multi-Purpose Advanced Formula delivers proven performance and premium value for every kind of vehicle in your fleet. Designed for the most demanding environments using proprietary corrosion inhibitor technology, World Oil is the gold standard in re-refined antifreeze. In addition to providing proven cost savings, it delivers superior protection for engine, radiator, and water pumps for up to 5 years or 150,000 miles.

By choosing a high quality, sustainably produced product, not only are you protecting the service life of the engine, you're also preserving profitability, and protecting our natural resources. With World Oil Antifreeze, you can minimize wear and tear, control costs, and reduce your carbon footprint, all while enhancing cooling system longevity.


See back panel for a full listing of specifications and recommended vehicles.

USAGE CONSIDERATIONS:

This product will perform as designed when used with ethylene glycol meeting ASTM E1177. Never use 100% coolant in concentrated form. Consider a 50% mixed with equal volume high quality, soft, de-ionized or distilled water. If coolant pH is below 6.5, a complete drain and fill is recommended.

Benefits for Your Fleet:

- Flexibility to use one antifreeze in your foreign and domestic passenger vehicles, and heavy duty engine applications
- Does not impart any significant color change if mixed with another engine coolant
- Extended protection against rust, corrosion and pitting
- Prevents freeze-up and boil-over when used according to OEM and product dilution guidelines
- Protects brass, copper, solder, steel, cast iron and aluminum
- Optimum protection against water pump corrosion and erosion-corrosion
- Compatible with current ethylene glycol-based engine coolants, IAT, HOAT, and OAT technologies
- Compatible with controlled atmosphere brazed (CAB) aluminum radiators
- Protects against wet sleeve liner cavitation without nitrite and molybdate
- Borate, nitrite, amine and phosphate free

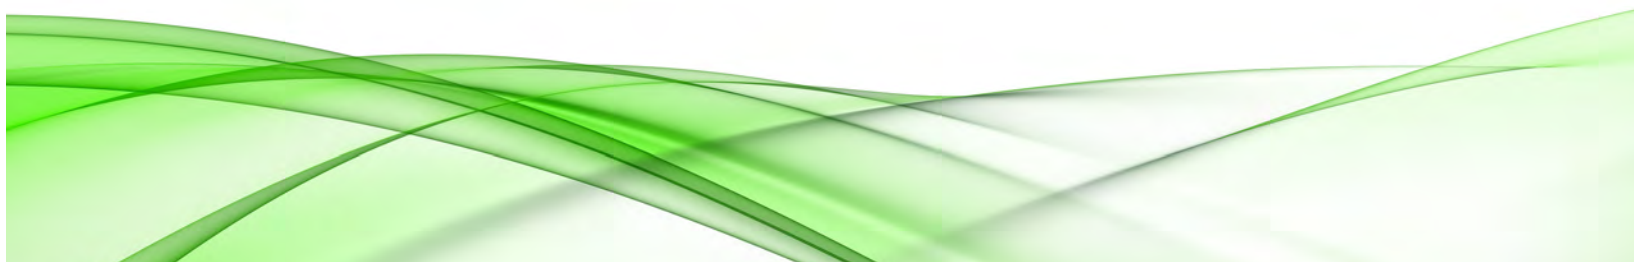

Meets the performance requirements of the following specifications:

| OEM/Agency | Specifications |
|------------|--|
| ASTM | D-3306 / D-6210 / D-4985 / D7583 (Pit Count 101) |
| BS | 6580 |
| DDC | 93K217 |
| GM | GM 1825M, GM 1899M |
| JIS | K2234 |

Coolant concentrate must be diluted with water prior to use. World Oil Multi-Purpose Antifreeze/Coolant should not be used in concentrated form. A 50% dilution is generally recommended for the best balance of protection against freezing, corrosion and summer boil over. For increased freeze protection in extremely cold areas, a 60% by volume concentration can be used. Concentrations of greater than 70% by volume are not recommended. High quality soft, de-ionized or distilled water should always be used to dilute coolant concentrate.

Recommended for use in:

| OEM/Agency | Specifications |
|---|--|
| BS | 6580 |
| Chrysler | MS7170 & MS9769 |
| Cummins | 14603 |
| DDC | 93K217, 7SE 298 |
| Ford | ESE-M97B44-A, WSSM97B44-D, & M97B51-A1 |
| Freightliner | 44822880 |
| GM | 6277M |
| GM | Heavy Truck |
| John Deere | JDM H24 |
| International | GEMS-B-1 |
| VW | TL774G |
| Caterpillar, Kenworth, Mack, PACCAR/DAF, Volvo Honda/Acura, Hyundai/Kia, General Motors, Mazda, Mercedes-Benz, Mitsubishi, Nissan/Infiniti, Subaru, Toyota/Scion/Lexus | |

Performance Testing

| | |
|------------|---|
| ASTM D3306 | ASTM D3306 (ASTM D1384, D2570, D2809, D4340) |
| Test | Test Results ¹ |
| D1384 | PASS |
| D4340 | PASS |
| D2570 | PASS |
| D7583 | Pit Count 101, 200 Max. |

| ASTM D2809 Aluminum Water Pump Cavitation - Erosion Corrosion Rating | Test Results | Spec. |
|--|--------------|--------|
| 100 hours | 9 | 8 min. |
| 300 hours | 9 | |
| 500 hours | 9 | |

¹Weight loss per coupon in milligrams (average for 3 tests)

²Aluminum Radiator tests

| Characteristic | Performance | Test Method |
|-------------------------------------|---------------|-------------|
| pH ^a | 8.0 - 9.0 | ASTM D1287 |
| Specific gravity ^b | 1.110 - 1.140 | ASTM D1122 |
| Freeze point (°C/°F) | -37/ -34 | ASTM D1177 |
| Foam volume (mL) | 150 max. | ASTM D1881 |
| Foam break time (second) | 5 max. | ASTM D1881 |
| Chloride (ppm) | 25 max. | ASTM D3634 |
| Color | Yellow | |
| Glycol Content (wt.%) | 93 min. | |
| Inhibitors and Water Content (wt.%) | 7 max. | |
| Silicon, from silicate (ppm) | 250 max. | |
| Boron (ppm) | < 10 | |
| Phosphorous | < 10 | |

World Oil Corporation is dedicated to preserving our environment. All laws and regulations should be observed for proper disposal. Contact the EPA or local municipality for proper disposal procedures in your area. For vehicles under warranty, please refer to your owners manual specifications. Distributed by: